

**DURABRITE**

**FELCO**<sup>®</sup>  
SWISS  MADE

**SWAGE-RIGHT**

# WIRE ROPE & FITTINGS



## FEATURING:

Wire Rope  
Swagers  
Cutters  
Swage Sleeves  
Thimbles  
Clips

 **U.S. RIGGING**  
SUPPLY

# CONTENTS

|                       |     |
|-----------------------|-----|
| Wire Rope.....        | 3-5 |
| Swagers.....          | 6-7 |
| Cutters.....          | 8   |
| Swage Sleeves.....    | 9   |
| Stop Sleeves .....    | 10  |
| Wire Rope Clips ..... | 10  |
| Thimbles.....         | 11  |

## COMPANY

U.S. Rigging Supply is a manufacturer & master distributor located in Santa Ana, CA. For over 40 years, we've grown through our focus on innovation, quality, dependability, and unmatched customer service. We're a trusted partner for rope and rigging products that ensures the success and safety of our customers.

We are specialists who have produced assemblies for countless applications. Our shop is equipped to handle the simple or the complex, from 1/32" to 1/2" wire rope. Our testing and quality control has been surveyed and approved by the U.S. Department of Defense, aerospace contractors and commercial OEMs throughout the United States.

You can rely on U.S. Rigging as your premier wire rope and wire rope fitting supplier as we offer professional recommendations from our sales team, and offer competitive pricing.



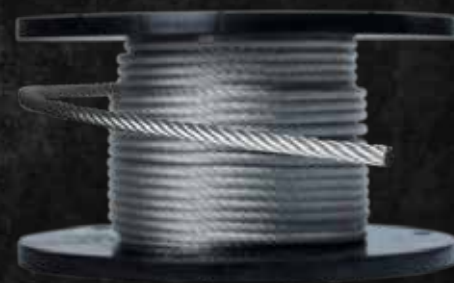
**ISO 9001:2015**



## LEADING SUPPLIER OF WIRE ROPE

We offer wire rope that is high-strength and durable. Made of stainless or carbon steel, Swage-Right wire rope come in a variety of preferences including coated, non-coated, or galvanized. Many of our ropes also meet military standard MIL-DTL 83420.

*Other grades and constructions also are available.*



### 1X19 316 STAINLESS STEEL WIRE ROPE

| SKU      | WIRE Ø | WLL*      | BREAK STRENGTH |
|----------|--------|-----------|----------------|
| W-10-002 | 1/16"  | 100 lbs   | 500 lbs        |
| W-10-003 | 3/32"  | 240 lbs   | 1,200 lbs      |
| W-10-004 | 1/8"   | 356 lbs   | 1,780 lbs      |
| W-10-006 | 3/16"  | 800 lbs   | 4,000 lbs      |
| W-10-008 | 1/4"   | 1,380 lbs | 6,900 lbs      |

### 1X19 304 STAINLESS STEEL WIRE ROPE

| SKU      | WIRE Ø | WLL*      | BREAK STRENGTH |
|----------|--------|-----------|----------------|
| W-11-002 | 1/16"  | 100 lbs   | 500 lbs        |
| W-11-003 | 3/32"  | 240 lbs   | 1,200 lbs      |
| W-11-004 | 1/8"   | 420 lbs   | 2,100 lbs      |
| W-11-005 | 5/32"  | 660 lbs   | 3,300 lbs      |
| W-11-006 | 3/16"  | 940 lbs   | 4,700 lbs      |
| W-11-008 | 1/4"   | 1,640 lbs | 8,200 lbs      |

### 7X7 304 STAINLESS STEEL WIRE ROPE

| SKU      | WIRE Ø | WLL*      | BREAK STRENGTH |
|----------|--------|-----------|----------------|
| W-13-001 | 3/64"  | 54 lbs    | 270 lbs        |
| W-13-002 | 1/16"  | 96 lbs    | 480 lbs        |
| W-13-003 | 3/32"  | 184 lbs   | 920 lbs        |
| W-13-004 | 1/8"   | 340 lbs   | 1,700 lbs      |
| W-13-005 | 5/32"  | 480 lbs   | 2,400 lbs      |
| W-13-006 | 3/16"  | 740 lbs   | 3,700 lbs      |
| W-13-008 | 1/4"   | 1,280 lbs | 6,400 lbs      |

### 7X7 GALVANIZED STEEL WIRE ROPE

| SKU      | WIRE Ø | WLL* (LBS) | BREAK STRENGTH |
|----------|--------|------------|----------------|
| W-22-001 | 3/64"  | 54 lbs     | 270 lbs        |
| W-22-002 | 1/16"  | 96 lbs     | 480 lbs        |
| W-22-003 | 3/32"  | 184 lbs    | 920 lbs        |
| W-22-004 | 1/8"   | 340 lbs    | 1,700 lbs      |
| W-22-005 | 5/32"  | 520 lbs    | 2,600 lbs      |
| W-22-006 | 3/16"  | 740 lbs    | 3,700 lbs      |
| W-22-008 | 1/4"   | 1,220 lbs  | 6,100 lbs      |





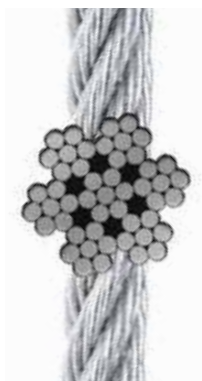
## 7X7 VINYL COATED STAINLESS STEEL WIRE ROPE

| SKU      | WIRE Ø | COATED Ø | WLL*    | BRK. STR. | COLOR |
|----------|--------|----------|---------|-----------|-------|
| W-30-512 | 3/64"  | 1/16"    | 54 lbs  | 270 lbs   | Clear |
| W-30-523 | 1/16"  | 3/32"    | 96 lbs  | 480 lbs   | Clear |
| W-30-534 | 3/32"  | 1/8"     | 184 lbs | 920 lbs   | Clear |
| W-30-545 | 1/8"   | 5/32"    | 340 lbs | 1,700 lbs | Clear |
| W-30-024 | 1/16"  | 1/8"     | 96 lbs  | 480 lbs   | White |
| W-30-047 | 1/8"   | 7/32"    | 340 lbs | 1,700 lbs | White |
| W-30-060 | 3/16"  | 5/16"    | 740 lbs | 3,700 lbs | White |



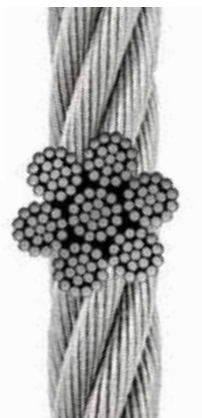
## 7X7 VINYL COATED GALVANIZED STEEL WIRE ROPE

| SKU      | WIRE Ø | COATED Ø | WLL*    | BRK. STR. | COLOR |
|----------|--------|----------|---------|-----------|-------|
| W-32-512 | 3/64"  | 1/16"    | 54 lbs  | 270 lbs   | Clear |
| W-32-523 | 1/16"  | 3/32"    | 96 lbs  | 480 lbs   | Clear |
| W-32-524 | 1/16"  | 1/8"     | 96 lbs  | 480 lbs   | Clear |
| W-32-534 | 3/32"  | 1/8"     | 184 lbs | 920 lbs   | Clear |
| W-32-334 | 3/32"  | 1/8"     | 184 lbs | 920 lbs   | Black |
| W-32-346 | 1/8"   | 3/16"    | 340 lbs | 1,700 lbs | Black |
| W-32-546 | 1/8"   | 3/16"    | 340 lbs | 1,700 lbs | Clear |
| W-32-046 | 1/8"   | 3/16"    | 340 lbs | 1,700 lbs | White |



## 7X7 STAINLESS STEEL WIRE ROPE (MIL-DTL 83420)

| SKU        | WIRE Ø | WLL*      | BREAK STRENGTH |
|------------|--------|-----------|----------------|
| W-13-101MS | 3/64"  | 54 lbs    | 270 lbs        |
| W-13-102MS | 1/16"  | 96 lbs    | 480 lbs        |
| W-13-103MS | 3/32"  | 184 lbs   | 920 lbs        |
| W-13-104MS | 1/8"   | 340 lbs   | 1,700 lbs      |
| W-13-105MS | 5/32"  | 520 lbs   | 2,600 lbs      |
| W-13-106MS | 3/16"  | 740 lbs   | 3,700 lbs      |
| W-13-108MS | 1/4"   | 1,220 lbs | 6,100 lbs      |



## 7X19 304 STAINLESS STEEL WIRE ROPE

| SKU      | WIRE Ø | WLL*      | BREAK STRENGTH |
|----------|--------|-----------|----------------|
| W-12-002 | 1/16"  | 96 lbs    | 480 lbs        |
| W-12-003 | 3/32"  | 184 lbs   | 920 lbs        |
| W-12-004 | 1/8"   | 352 lbs   | 1,760 lbs      |
| W-12-005 | 5/32"  | 480 lbs   | 2,400 lbs      |
| W-12-006 | 3/16"  | 740 lbs   | 3,700 lbs      |
| W-12-008 | 1/4"   | 1,280 lbs | 6,400 lbs      |
| W-12-010 | 5/16"  | 1,800 lbs | 9,000 lbs      |
| W-12-012 | 3/8"   | 2,400 lbs | 12,000 lbs     |

Wire rope is sold by the spool in 500', 1,000', 2,500' and 5,000' put-ups. Re-spooling extra for non-standard lengths.

*\*Working Load Limit (WLL) is approximately 20% of average break strength which allows a 5:1*



**7X19 304 STAINLESS STEEL WIRE ROPE (MIL-DTL 83420)**

| SKU        | WIRE  | WLL* (LBS) | WEIGHT / 1,000 FT. |
|------------|-------|------------|--------------------|
| W-12-102MS | 1/16" | 96 lbs     | 480 lbs            |
| W-12-103MS | 3/32" | 184 lbs    | 920 lbs            |
| W-12-104MS | 1/8"  | 352 lbs    | 1,760 lbs          |
| W-12-105MS | 5/32" | 480 lbs    | 2,400 lbs          |
| W-12-106MS | 3/16" | 740 lbs    | 3,700 lbs          |
| W-12-108MS | 1/4"  | 1,280 lbs  | 6,400 lbs          |
| W-12-110MS | 5/16" | 1,800 lbs  | 9,000 lbs          |

**7X19 GALVANIZED STEEL WIRE ROPE**

| SKU      | WIRE Ø | WLL*      | BREAK STRENGTH |
|----------|--------|-----------|----------------|
| W-21-003 | 3/32"  | 200 lbs   | 1,000 lbs      |
| W-21-004 | 1/8"   | 400 lbs   | 2,000 lbs      |
| W-21-005 | 5/32"  | 560 lbs   | 2,800 lbs      |
| W-21-006 | 3/16"  | 840 lbs   | 4,200 lbs      |
| W-21-008 | 1/4"   | 1,400 lbs | 7,000 lbs      |
| W-21-010 | 5/16"  | 1,960 lbs | 9,800 lbs      |
| W-21-012 | 3/8"   | 2,880 lbs | 14,400 lbs     |

**7X19 GALVANIZED STEEL WIRE ROPE (MIL-DTL 83420)**

| SKU        | WIRE Ø | WLL*      | BREAK STRENGTH |
|------------|--------|-----------|----------------|
| W-21-104MS | 1/8"   | 400 lbs   | 2,000 lbs      |
| W-21-105MS | 5/32"  | 560 lbs   | 2,800 lbs      |
| W-21-106MS | 3/16"  | 840 lbs   | 4,200 lbs      |
| W-21-108MS | 1/4"   | 1,400 lbs | 7,000 lbs      |
| W-21-010MS | 5/16"  | 1,960 lbs | 9,800 lbs      |

**7X19 NYLON COATED GALVANIZED STEEL WIRE ROPE**

| SKU      | WIRE Ø | COATED Ø | WLL*    | BRK. STR. | COLOR |
|----------|--------|----------|---------|-----------|-------|
| W-31-246 | 1/8"   | 3/16"    | 400 lbs | 2,000 lbs | Clear |
| W-31-446 | 1/8"   | 3/16"    | 400 lbs | 2,000 lbs | Black |
| W-31-268 | 3/16"  | 1/4"     | 840 lbs | 4,200 lbs | Clear |
| W-31-468 | 3/16"  | 1/4"     | 840 lbs | 4,200 lbs | Black |

**7X19 NYLON COATED GALVANIZED STEEL WIRE ROPE (MIL-DTL 83420)**

| SKU          | WIRE Ø | COATED Ø | WLL*      | BRK. STR. | COLOR |
|--------------|--------|----------|-----------|-----------|-------|
| W-31-123MS   | 1/16"  | 3/32"    | 96 lbs    | 480 lbs   | Clear |
| W-31-134MS   | 3/32"  | 1/8"     | 200 lbs   | 1,000 lbs | Clear |
| W-31-146MS   | 1/8"   | 3/16"    | 400 lbs   | 2,000 lbs | Clear |
| W-31-168MS   | 3/16"  | 1/4"     | 840 lbs   | 4,200 lbs | Clear |
| W-31-10810MS | 1/4"   | 5/16"    | 1,400 lbs | 7,000 lbs | Clear |
| W-31-446MS   | 1/8"   | 3/16"    | 400 lbs   | 2,000 lbs | Black |
| W-31-468MS   | 3/16"  | 1/4"     | 840 lbs   | 4,200 lbs | Black |



# SWAGE-RIGHT



## SMALL-CAVITY HAND SWAGERS



| SKU      | WIRE SIZE | LENGTH | WEIGHT |
|----------|-----------|--------|--------|
| P-25-015 | 3/64"     | 8"     | 1 lb   |
| P-25-02  | 1/16"     | 8"     | 1 lb   |



## FOUR-CAVITY HAND SWAGER

| SKU    | OVAL SLEEVES                  | LENGTH |
|--------|-------------------------------|--------|
| P-23-0 | 1/32" • 3/64" • 1/16" • 3/32" | 12"    |



## THREE-CAVITY HAND SWAGERS

| SKU        | OVAL SLEEVES          | MAX CUT | LENGTH |
|------------|-----------------------|---------|--------|
| P-22-234H  | 1/16" • 3/32" • 1/8"  | -       | 14"    |
| P-22-234HC | 1/16" • 3/32" • 1/8"  | 1/8"    | 14"    |
| P-22-346   | 3/32" • 1/8" • 3/16"  | -       | -      |
| P-22-510H  | 5/32" • 1/4" • 5/16"  | -       | 30"    |
| P-22-510HC | 5/32" • 1/4" • 5/16"  | 5/16"   | 30"    |
| P-22-ST9   | 1/32" • 3/64" • 1/16" | 1/32"   | 9"     |

## FIVE-CAVITY HAND SWAGERS

| SKU        | OVAL SLEEVES                         | MAX CUT | LENGTH |
|------------|--------------------------------------|---------|--------|
| P-21-205H  | 1/16" • 3/32" • 1/8" • 5/32" • 3/16" | -       | 24"    |
| P-21-205HC | 1/16" • 3/32" • 1/8" • 5/32" • 3/16" | 1/8"    | 24"    |

**⚠ WARNING:** The swaging of compression fittings directly over plastic coated wire rope will result in severely reduced holding power and is NOT recommended particularly in applications where human safety, lifting or full wire strength is involved. We recommend removing a sufficient length of the plastic jacket and swaging the proper size fitting directly over the bare wire rope.



## GREAT PRODUCTS // QUALITY THAT LASTS

U.S. Rigging offers a full-range of Swage-Right single and multi-cavity swagers. All of our swagers are designed with a snap-action jaw to ensure a tight, strong compression every time.

Adjustable jaws are made of the finest grade of fully hardened tool steel to ensure years of service. All swaging tools are conveniently labeled for easy identification for the correct cavity size.



### SIX-CAVITY HAND SWAGER

| SKU      | OVAL SLEEVES                                    | LENGTH |
|----------|-------------------------------------------------|--------|
| P-21-005 | 3/64" • 1/16" • 3/32" •<br>1/8" • 5/32" • 3/16" | 18"    |

### FIVE-CAVITY BENCH SWAGERS



| SKU       | OVAL SLEEVES   | LENGTH |
|-----------|----------------|--------|
| P-21-105J | 1/16" to 3/16" | 17.7"  |



### HEAVY-DUTY SINGLE-CAVITY HAND SWAGERS

| SKU     | SLEEVE SIZE |         |                   | LENGTH |
|---------|-------------|---------|-------------------|--------|
|         | OVAL        | SS OVAL | STOP              |        |
| P-23-7  | 7/32"       | 1/4"    | -                 | 28"    |
| P-23-8  | 1/4"        | -       | 1/4", 5/16", 3/8" | 28"    |
| P-23-8H | 1/4"        | -       | -                 | 28"    |
| P-23-10 | 5/16"       | -       | -                 | 28"    |
| P-23-12 | 3/8"        | -       | 13/32"            | 36"    |

### STAINLESS STEEL SLEEVE HAND SWAGERS

| SKU    | SLEEVE SIZE |              |             | LENGTH |
|--------|-------------|--------------|-------------|--------|
|        | OVAL        | SS OVAL      | STOP        |        |
| P-23-1 | 3/64"       | 3/64", 1/16" | 3/64"       | 20"    |
| P-23-2 | 1/16"       | 3/32"        | 1/16"       | 20"    |
| P-23-3 | 3/32"       | 1/8"         | 3/32", 1/8" | 20"    |
| P-23-5 | 5/32"       | 3/16"        | -           | 20"    |
| P-23-6 | 3/16"       | 7/32"        | -           | 20"    |

Previous Page: **A** P-22-234H **B** P-22-234HC **C** P-22-346 **D** P-22-510H **E** P-22-510HC **F** P-22-ST9 **G** P-21-205H **H** P-21-205HC

Current Page: **I** P-23-7 **J** P-23-8H **K** P-23-12 **L** P-23-1





## LARGE DIAMETER WIRE ROPE CUTTERS

|                      |            |
|----------------------|------------|
| <b>SKU</b>           | P-20-C9    |
| <b>STEEL CABLE Ø</b> | Up to 1/4" |
| <b>BRAND</b>         | FELCO      |
| <b>LENGTH</b>        | 13"        |



|                    |            |
|--------------------|------------|
| <b>SKU</b>         | P-20-C12   |
| <b>WIRE ROPE Ø</b> | Up to 3/8" |
| <b>BRAND</b>       | FELCO      |
| <b>LENGTH</b>      | 19"        |

## SMALL DIAMETER WIRE ROPE CUTTERS



|                    |             |
|--------------------|-------------|
| <b>SKU</b>         | P-27-06     |
| <b>WIRE ROPE Ø</b> | Up to 3/16" |
| <b>BRAND</b>       | SWAGE-RIGHT |
| <b>LENGTH</b>      | 8"          |



|                    |            |
|--------------------|------------|
| <b>SKU</b>         | P-20-C7    |
| <b>WIRE ROPE Ø</b> | Up to 1/4" |
| <b>BRAND</b>       | FELCO      |
| <b>LENGTH</b>      | 7-1/2"     |



|                    |             |
|--------------------|-------------|
| <b>SKU</b>         | P-24-7      |
| <b>WIRE ROPE Ø</b> | Up to 1/4"  |
| <b>BRAND</b>       | SWAGE-RIGHT |
| <b>LENGTH</b>      | 7-1/2"      |



|                    |            |
|--------------------|------------|
| <b>SKU</b>         | P-20-C16   |
| <b>WIRE ROPE Ø</b> | Up to 5/8" |
| <b>BRAND</b>       | FELCO      |
| <b>LENGTH</b>      | 23"        |



|                    |              |
|--------------------|--------------|
| <b>SKU</b>         | P-24-9       |
| <b>WIRE ROPE Ø</b> | Up to 11/32" |
| <b>BRAND</b>       | SWAGE-RIGHT  |
| <b>LENGTH</b>      | 23"          |



|                    |             |
|--------------------|-------------|
| <b>SKU</b>         | P-24-12     |
| <b>WIRE ROPE Ø</b> | Up to 1/2"  |
| <b>BRAND</b>       | SWAGE-RIGHT |
| <b>LENGTH</b>      | 20"         |



|                    |             |
|--------------------|-------------|
| <b>SKU</b>         | P-24-16     |
| <b>WIRE ROPE Ø</b> | Up to 5/8"  |
| <b>BRAND</b>       | SWAGE-RIGHT |
| <b>LENGTH</b>      | 650 mm      |

## A CUT ABOVE THE REST

All cutters are light-weight for easy handling. Plastic coated grips offer a firm, comfortable feel.

Swiss made Felco® cutters are recognized around the world for their precision cutting capabilities and quality construction. Our Swage-Right® cutters also offer quality construction and excellent shear-cut performance with economical pricing.



## PLAIN COPPER DUPLEX SLEEVES



| SKU      | Wire Ø | L      | W      | H      | MS-51844 |
|----------|--------|--------|--------|--------|----------|
| S-10-000 | 1/32"  | 0.248" | 0.086" | 0.129" | -40      |
| S-10-001 | 3/64"  | 0.375" | 0.134" | 0.201" | -41      |
| S-10-002 | 1/16"  | 0.375" | 0.170" | 0.251" | -42      |
| S-10-003 | 3/32"  | 0.425" | 0.224" | 0.369" | -43      |
| S-10-004 | 1/8"   | 0.550" | 0.324" | 0.492" | -44      |
| S-10-005 | 5/32"  | 0.625" | 0.365" | 0.592" | -45      |
| S-10-006 | 3/16"  | 1.000" | 0.449" | 0.671" | -46      |
| S-10-007 | 7/32"  | 0.875" | 0.461" | 0.713" | -47      |
| S-10-008 | 1/4"   | 1.138" | 0.515" | 0.810" | -48      |
| S-10-010 | 5/16"  | 1.125" | 0.665" | 1.010" | -49      |
| S-10-012 | 3/8"   | 1.250" | 0.727" | 1.110" | -50      |
| S-10-014 | 7/16"  | 1.750" | 0.850" | 1.300" | -51      |
| S-10-016 | 1/2"   | 1.900" | 0.965" | 1.480" | -52      |

## SWAGE-RIGHT

Swage sleeves (also known as cable ferrules) are wire rope fittings that are commonly used to form loop ends or wire splices.

Our sleeves are available in plain copper, zinc plated copper, tin plated copper, aluminum and stainless steel material.

Swage-Right® duplex swage sleeves are manufactured in the U.S.A. to U.S. military standard MS-51844. Our swage sleeves can meet a variety of rigging or cable assembly needs.

*When properly machine swaged, Swage-Right® duplex copper sleeves hold 100% of the wire rope rated strength (90% for hand-swaged).*



## ZINC-PLATED COPPER DUPLEX SLEEVES



| SKU      | Wire Ø | L      | W      | H      | MS-51844 |
|----------|--------|--------|--------|--------|----------|
| S-11-000 | 1/32"  | 0.248" | 0.086" | 0.129" | -20      |
| S-11-001 | 3/64"  | 0.375" | 0.134" | 0.201" | -21      |
| S-11-002 | 1/16"  | 0.375" | 0.170" | 0.251" | -22      |
| S-11-003 | 3/32"  | 0.425" | 0.224" | 0.369" | -23      |
| S-11-004 | 1/8"   | 0.550" | 0.324" | 0.392" | -24      |
| S-11-005 | 5/32"  | 0.625" | 0.365" | 0.592" | -25      |
| S-11-006 | 3/16"  | 1.000" | 0.449" | 0.671" | -26      |
| S-11-007 | 7/32"  | 0.875" | 0.461" | 0.713" | -27      |
| S-11-008 | 1/4"   | 1.138" | 0.515" | 0.810" | -28      |
| S-11-010 | 5/16"  | 1.125" | 0.665" | 1.010" | -29      |
| S-11-012 | 3/8"   | 1.250" | 0.727" | 1.110" | -30      |
| S-11-014 | 7/16"  | 1.750" | 0.850" | 1.300" | -31      |
| S-11-016 | 1/2"   | 1.900" | 0.965" | 1.480" | -32      |

## ALUMINUM DUPLEX SLEEVES



**WARNING:** The use of aluminum duplex and stop sleeves with stainless steel wire is NOT recommended as this will cause electrolysis and corrosion.

| SKU        | Wire Ø | L      | W      | H      |
|------------|--------|--------|--------|--------|
| S-40-001   | 3/64"  | 0.375" | 0.133" | 0.198" |
| S-40-002   | 1/16"  | 0.375" | 0.172" | 0.250" |
| S-40-003   | 3/32"  | 0.500" | 0.281" | 0.406" |
| S-40-103TW | 3/32"  | 0.500" | 0.227" | 0.373" |
| S-40-004   | 1/8"   | 0.625" | 0.344" | 0.500" |
| S-40-104TW | 1/8"   | 0.625" | 0.342" | 0.500" |
| S-40-005   | 5/32"  | 0.688" | 0.375" | 0.562" |
| S-40-006   | 3/16"  | 1.000" | 0.440" | 0.665" |
| S-40-007   | 7/32"  | 1.060" | 0.500" | 0.750" |
| S-40-008   | 1/4"   | 1.125" | 0.536" | 0.812" |
| S-40-010   | 5/16"  | 1.250" | 0.687" | 1.032" |
| S-40-012   | 3/8"   | 1.438" | 0.750" | 1.156" |
| S-40-016   | 1/2"   | 2.000" | 1.060" | 1.625" |

## TIN-PLATED COPPER DUPLEX SLEEVES



| SKU      | Wire Ø | L      | W      | H      | MS-51844 |
|----------|--------|--------|--------|--------|----------|
| S-13-000 | 1/32"  | 0.248" | 0.086" | 0.129" | -80      |
| S-13-001 | 3/64"  | 0.375" | 0.134" | 0.201" | -81      |
| S-13-002 | 1/16"  | 0.375" | 0.170" | 0.251" | -82      |
| S-13-003 | 3/32"  | 0.425" | 0.224" | 0.369" | -83      |
| S-13-004 | 1/8"   | 0.550" | 0.324" | 0.492" | -84      |
| S-13-005 | 5/32"  | 0.625" | 0.365" | 0.592" | -85      |
| S-13-006 | 3/16"  | 1.000" | 0.449" | 0.671" | -86      |
| S-13-007 | 7/32"  | 0.875" | 0.461" | 0.713" | -87      |
| S-13-008 | 1/4"   | 1.138" | 0.515" | 0.810" | -88      |
| S-13-010 | 5/16"  | 1.125" | 0.665" | 1.010" | -89      |
| S-13-012 | 3/8"   | 1.250" | 0.727" | 1.110" | -90      |
| S-13-014 | 7/16"  | 1.750" | 0.850" | 1.300" | -91      |
| S-13-016 | 1/2"   | 1.900" | 0.965" | 1.480" | -92      |

## STAINLESS STEEL SWAGE SLEEVES



| SKU      | Wire Ø | L      | W      | H      | MS-51844 |
|----------|--------|--------|--------|--------|----------|
| S-30-000 | 1/32"  | 0.255" | 0.092" | 0.135" | -60      |
| S-30-001 | 3/64"  | 0.375" | 0.133" | 0.201" | -61      |
| S-30-002 | 1/16"  | 0.375" | 0.137" | 0.229" | -62      |
| S-30-003 | 3/32"  | 0.375" | 0.184" | 0.298" | -63      |
| S-30-004 | 1/8"   | 0.375" | 0.233" | 0.380" | -64      |
| S-30-005 | 5/32"  | 0.720" | 0.322" | 0.500" | -65      |
| S-30-006 | 3/16"  | 0.875" | 0.352" | 0.564" | -66      |
| S-30-007 | 7/32"  | 0.880" | 0.430" | 0.667" | -67      |
| S-30-008 | 1/4"   | 1.130" | 0.454" | 0.716" | -68      |



## DURABILITY FOR THE LONG HAUL

Swage-Right™ stop sleeves are a quick and economical way to enclose the ends of a wire rope in order to prevent the wire from fraying. They are also a great alternative to wire rope clips and thimbles.

*When properly swaged, stop sleeves are capable of holding 1/3 to 1/2 of the rated strength of the wire rope (application load testing is always recommended).*

### ZINC-PLATED COPPER STOP SLEEVES



| SKU      | Wire Ø | L      | W      |
|----------|--------|--------|--------|
| S-62-000 | 1/32"  | 0.200" | 0.129" |
| S-62-001 | 3/64"  | 0.252" | 0.170" |
| S-62-002 | 1/16"  | 0.218" | 0.203" |
| S-62-003 | 3/32"  | 0.328" | 0.328" |
| S-62-004 | 1/8"   | 0.328" | 0.328" |
| S-62-005 | 5/32"  | 0.328" | 0.422" |
| S-62-006 | 3/16"  | 0.328" | 0.422" |
| S-62-007 | 7/32"  | 0.703" | 0.656" |
| S-62-008 | 1/4"   | 0.703" | 0.656" |
| S-62-010 | 5/16"  | 0.703" | 0.656" |

### PLAIN COPPER STOP SLEEVES



| SKU      | Wire Ø | L      | W      |
|----------|--------|--------|--------|
| S-60-000 | 1/32"  | 0.200" | 0.129" |
| S-60-001 | 3/64"  | 0.252" | 0.170" |
| S-60-002 | 1/16"  | 0.218" | 0.203" |
| S-60-003 | 3/32"  | 0.328" | 0.328" |
| S-60-004 | 1/8"   | 0.328" | 0.328" |
| S-60-005 | 5/32"  | 0.328" | 0.422" |
| S-60-006 | 3/16"  | 0.328" | 0.422" |
| S-60-007 | 7/32"  | 0.703" | 0.656" |
| S-60-008 | 1/4"   | 0.703" | 0.656" |
| S-60-010 | 5/16"  | 0.703" | 0.656" |

### ALUMINUM STOP SLEEVES



| SKU      | Wire Ø | L      | W      |
|----------|--------|--------|--------|
| S-61-002 | 1/16"  | 0.156" | 0.250" |
| S-61-003 | 3/32"  | 0.313" | 0.344" |
| S-61-004 | 1/8"   | 0.313" | 0.344" |
| S-61-005 | 5/32"  | 0.344" | 0.438" |
| S-61-006 | 3/16"  | 0.344" | 0.438" |
| S-61-008 | 1/4"   | 0.688" | 0.688" |
| S-61-010 | 5/16"  | 0.703" | 0.656" |
| S-61-012 | 3/8"   | 0.703" | 0.660" |

**⚠ WARNING:** The use of aluminum duplex and stop sleeves with stainless steel wire is NOT recommended as this will cause electrolysis and corrosion.

### WIRE ROPE CLIPS



Wire rope clips or u-bolt clamps are used to clasp the loose end of a length of wire rope once it has been looped back to form an eye. DuraBrite® wire rope clips are made from drop forged galvanized steel or stainless steel to ensure long lasting strength, durability and dependability.

#### 316 STAINLESS STEEL WIRE ROPE CLIPS



| SKU     | Wire Ø        | Required QTY* |
|---------|---------------|---------------|
| K-34-03 | 1/16" - 3/32" | 2             |
| K-34-04 | 1/8"          | 2             |
| K-34-05 | 5/32"         | 2             |
| K-34-06 | 3/16"         | 3             |
| K-34-08 | 1/4"          | 3             |
| K-34-10 | 5/16"         | 3             |
| K-34-12 | 3/8"          | 3             |

#### MALLEABLE GALV. STEEL WIRE ROPE CLIPS



| SKU      | Wire Ø | Required QTY* |
|----------|--------|---------------|
| F-16-002 | 1/16"  | 3             |
| F-16-004 | 1/8"   | 3             |
| F-16-006 | 3/16"  | 3             |
| F-16-008 | 1/4"   | 3             |
| F-16-010 | 5/16"  | 3             |
| F-16-012 | 3/8"   | 3             |
| F-16-016 | 1/2"   | 4             |


*A visual inspection should be carried out prior to and during use.*

*\*To comply with manufacturer's specifications the correct number of clips must be installed correctly and tightened to the correct torque using a torque wrench. The correct installation technique is shown below.*




**⚠ WARNING:** Nuts should be re-tightened regularly. Wire rope clips are not to be used on plastic coated cable without first stripping off plastic. Wire rope clips should be installed over bare cable only.




**ZINC-PLATED STEEL FF-T-276 B TYPE II**


| SKU      | Wire Ø | A     | B     | C     |
|----------|--------|-------|-------|-------|
| F-15-304 | 1/8"   | 1.88" | 1.19" | 0.75" |
| F-15-306 | 3/16"  | 2.00" | 1.19" | 0.75" |
| F-15-308 | 1/4"   | 1.88" | 1.19" | 0.75" |
| F-15-310 | 5/16"  | 2.06" | 1.31" | 0.75" |
| F-15-312 | 3/8"   | 2.31" | 1.75" | 1.00" |
| F-15-316 | 1/2"   | 2.31" | 1.88" | 1.17" |
| F-15-320 | 5/8"   | 3.48" | 2.34" | 1.40" |

**SUPER HEAVY-DUTY 316 STAINLESS STEEL**


| SKU       | Wire Ø | A     | B     |
|-----------|--------|-------|-------|
| F-15-4410 | 5/16"  | 2.28" | 0.96" |
| F-15-4412 | 3/8"   | 2.66" | 1.11" |
| F-15-4414 | 7/16"  | 3.35" | 1.44" |
| F-15-4416 | 1/2"   | 4.31" | 1.84" |
| F-15-4420 | 5/8"   | 4.88" | 2.36" |
| F-15-4424 | 3/4"   | 5.04" | 2.36" |
| F-15-4432 | 1"     | 5.75" | 2.91" |

**HOT-DIPPED HEAVY-DUTY GALVANIZED STEEL**


| SKU       | Wire Ø | A     | B     | C     |
|-----------|--------|-------|-------|-------|
| F-15-404  | 1/8"   | 1.25" | 2.31" | 1.63" |
| F-15-406  | 3/16"  | 1.50" | 1.19" | 0.75" |
| F-15-408  | 1/4"   | 2.25" | 1.31" | 0.75" |
| F-15-408Z | 1/4"   | 2.06" | 1.63" | 0.88" |
| F-15-410  | 5/16"  | 2.50" | 1.88" | 1.06" |
| F-15-412  | 3/8"   | 2.75" | 1.88" | 1.25" |
| F-15-416  | 1/2"   | 3.50" | 2.50" | 1.38" |
| F-15-420  | 5/8"   | 4.25" | 4.00" | 1.75" |
| F-15-424  | 3/4"   | 5.00" | 3.50" | 2.00" |
| F-15-432  | 1"     | 6.00" | 4.00" | 2.50" |

**HEAVY-DUTY 316 STAINLESS STEEL**


| SKU      | Wire Ø        | A     | B     | C     |
|----------|---------------|-------|-------|-------|
| F-15-103 | 3/32" - 1/16" | 0.91" | 0.66" | 0.38" |
| F-15-104 | 1/8"          | 0.50" | 0.69" | 0.38" |
| F-15-105 | 5/32"         | 1.09" | 0.78" | 0.44" |
| F-15-106 | 3/16"         | 1.25" | 0.81" | 0.50" |
| F-15-108 | 1/4"          | 1.59" | 1.06" | 0.59" |
| F-15-110 | 5/16"         | 2.00" | 1.50" | 0.88" |
| F-15-112 | 3/8"          | 2.28" | 1.59" | 0.94" |
| F-15-116 | 1/2"          | 2.75" | 2.13" | 1.13" |
| F-15-120 | 5/8"          | 3.53" | 3.53" | 1.56" |
| F-15-124 | 3/4"          | 4.53" | 3.31" | 2.00" |

**304 STAINLESS STEEL AN-100C TYPE**


| SKU      | Wire Ø        | A     | B     |
|----------|---------------|-------|-------|
| F-15-002 | 3/64" - 1/16" | 0.70" | 0.35" |
| F-15-004 | 3/32" - 1/8"  | 0.70" | 0.35" |
| F-15-005 | 5/32"         | 0.79" | 0.40" |
| F-15-006 | 3/16"         | 1.00" | 0.50" |
| F-15-008 | 7/32" - 1/4"  | 1.41" | 0.70" |
| F-15-010 | 5/16"         | 1.08" | 0.90" |
| F-15-012 | 3/8"          | 2.00" | 1.00" |

**ZINC-PLATED STEEL AN-100C TYPE**


| SKU      | Wire Ø        | A     | B     |
|----------|---------------|-------|-------|
| F-15-202 | 3/64" - 1/16" | 0.70" | 0.35" |
| F-15-204 | 3/32" - 1/8"  | 0.70" | 0.35" |
| F-15-205 | 5/32"         | 0.79" | 0.40" |
| F-15-206 | 3/16"         | 1.00" | 0.50" |
| F-15-208 | 7/32" - 1/4"  | 1.41" | 0.70" |
| F-15-210 | 5/16"         | 1.08" | 0.90" |

**304 STAINLESS STEEL**


| SKU         | Wire Ø       | A     | B     | C     |
|-------------|--------------|-------|-------|-------|
| F-15-502-04 | 1/16"        | 0.81" | 0.71" | 0.30" |
| F-15-504-04 | 3/32" - 1/8" | 0.96" | 0.83" | 0.39" |
| F-15-505-04 | 5/32"        | 1.09" | 0.98" | 0.53" |
| F-15-506-04 | 3/16"        | 1.20" | 1.02" | 0.51" |
| F-15-508-04 | 1/4"         | 1.46" | 1.28" | 0.61" |

**316 STAINLESS STEEL**

| SKU      | Wire Ø       | A     | B     | C     |
|----------|--------------|-------|-------|-------|
| F-15-502 | 1/16"        | 0.81" | 0.71" | 0.30" |
| F-15-504 | 3/32" - 1/8" | 0.96" | 0.83" | 0.39" |
| F-15-505 | 5/32"        | 1.09" | 0.98" | 0.53" |
| F-15-506 | 3/16"        | 1.20" | 1.02" | 0.51" |
| F-15-508 | 1/4"         | 1.46" | 1.28" | 0.61" |

**GUSSET HEAVY-DUTY 316 STAINLESS STEEL**

| SKU       | Wire Ø | A     | B     |
|-----------|--------|-------|-------|
| F-15-4510 | 5/16"  | 1.42" | 0.57" |
| F-15-4512 | 3/8"   | 1.85" | 0.74" |
| F-15-4514 | 7/16"  | 2.09" | 1.06" |
| F-15-4516 | 1/2"   | 2.38" | 1.09" |
| F-15-4520 | 5/8"   | 2.83" | 1.34" |

**TUBE HEAVY-DUTY 316 STAINLESS STEEL**

| SKU       | Wire Ø       | A     | B     |
|-----------|--------------|-------|-------|
| F-15-5014 | 3-8" - 7/16" | 3.54" | 0.83" |
| F-15-5016 | 1/2"         | 3.94" | 0.91" |
| F-15-5024 | 5/8" - 3/4"  | 4.65" | 1.06" |
| F-15-5032 | 7/8" - 1"    | 5.79" | 1.42" |



**U.S. Rigging Supply**

1600 E. McFadden Ave.  
Santa Ana, CA 92705



**U.S. RIGGING**  
**S U P P L Y**

**[www.usrigging.com](http://www.usrigging.com)**  
**(866) 490-7444**